


Note: All addresses are physical. For most addresses, add +0x8000000 for RAM or 0xC0000000 for I/O to get logical address on PPC side.

10000000-12FFFFFF  
10000000-13FFFFFF


64MB  
GDDR3  
RAM

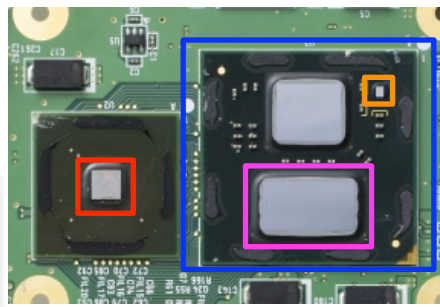

A/V  
controller

"Hollywood"

PowerPC  
750CL CPU  
("Broadway")

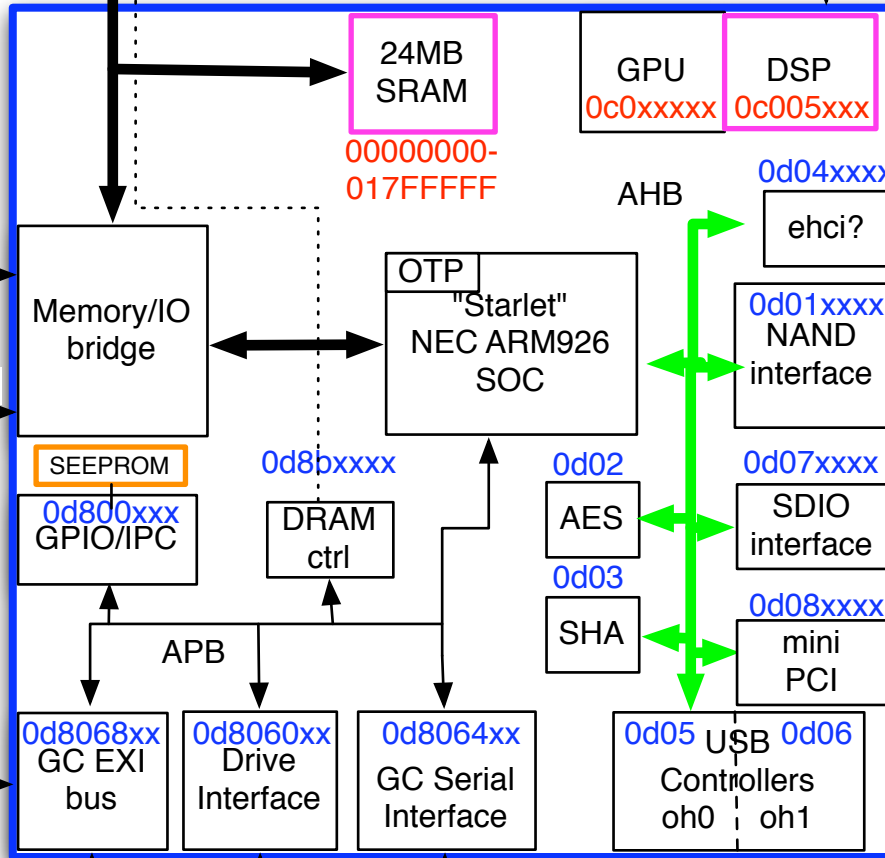

Note: depending on mode, 0d8 addresses may be remapped to 0d0, cc0 or cd0.

GC Font  
ROM / RTC

GC Mem  
Card  
slots (2)

Disc  
drive

GC  
controller  
ports (4)

BT  
module

External  
USB  
ports

Waikiki  
debug  
adapter?

USB /  
SD  
Gecko

bushing /  
hackmii.com

USB  
Ethernet  
adapter

USB  
Keyboard